

# FIBER OPTIC TEMPERATURE SENSOR

FIBER OPTIC TEMPERATURE SENSOR FOR R&D AND INDUSTRIAL APPLICATIONS



## KEY FEATURES

- Robust design
- Welded tip design
- Outstanding repeatability and good accuracy
- EMI/RFI/RFI and microwave immune
- Intrinsically safe
- OEM-type and custom version

**OTG-Q** Compatible with Opsens Solutions' GaAs (SCBG) signal conditioners

## DESCRIPTION

Opsens Solutions' OTG-Q **fiber optic temperature sensor offers the highest performance in the industry**. The OTG-Q model uses the well proven technique based on the temperature-dependent bandgap of GaAs crystal as the temperature transduction mechanism. Its small sensing GaAs crystal located at the tip of the optical fiber makes it convenient for **tip measurement applications**.

Combined with Opsens Solutions' SCBG (Semiconductor Bandgap) signal conditioning technology and the inherent advantages of fiber optic, the OTG-Q delivers **unprecedented repeatability and reliability in the most adverse conditions** such as high level of EM, RF, MR and microwave field environments.

The standard operating range of the OTG-Q is from **-40 °C to +250 °C**. The OTG-Q is made with industry standard optical fiber and is compatible with all Opsens Solutions' GaAs (SCBG) signal conditioners.


This welded design in 1.4mm OD PFA sheath option offer **complete seal at the tip best suitable for all applications that involves liquid immersion**.

## APPLICATIONS

- EM, RF and microwave environments
- High voltage environments
- Nuclear and hazardous environments
- Microwave assisted chemistry
- In-situ process control
- RF and microwave drying applications

# OTG-Q

## FIBER OPTIC TEMPERATURE SENSOR

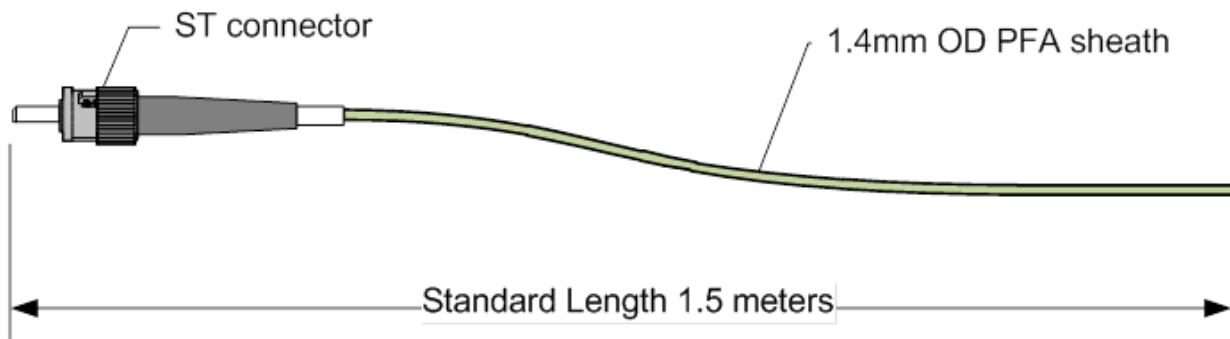

### SPECIFICATIONS

TEMPERATURE OPERATING AND CALIBRATED RANGE	-40 °C to +250 °C (other ranges available upon request)
RESOLUTION	0.01 °C
ACCURACY	± 0.8 °C or better for other temperature range
RESPONSE TIME	1.0 s typical ( For faster response time, see other OTG-series sensor)
OPERATING HUMIDITY RANGE	0-100 %
EMI/RFI SUSCEPTIBILITY	Complete immunity
CALIBRATION	NIST traceable
CABLE LENGTH	1.5 meters standard (other lengths available)
OPTICAL CONNECTOR	LCA, ST standard
CABLE SHEATHING	PFA sheath 1.4mm OD
SIGNAL CONDITIONER COMPATIBILITY	All Opsens solutions' GaAs (SCBG) signal conditioners